



創唯實業有限公司

PLASTRONIC TECHNOLOGY CO., LTD.

TEL : 886-2-2276-3375

www.loadcell.com.tw

E-mail: plastronictech@gmail.com



FAX : 886-2-2276-3557

www.plastronic.com.tw

新北市24252新莊區化成路398巷13號

No.13, Lane 398, Huacheng Rd., Xinzhuang Dist., New Taipei City 24252, Taiwan

NQ14

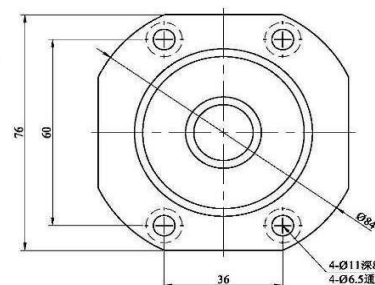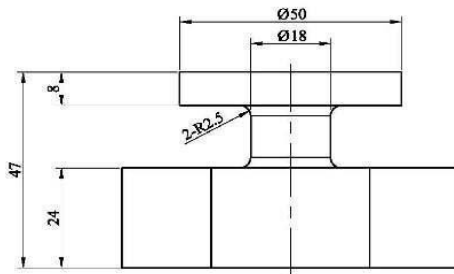

應用：卡氏模專用沖壓荷重元

Applications: applicator of stamping and clamping machine

技術規格 Specification

額定荷重	Rated Capacities	4, 40 kN
額定輸出	Rated Output	0.85~0.88 mV/V
精度等級	Accuracy class	
非線性	Non-linearity	< 1 %F.S
遲滯	Hysteresis	< 1 %F.S
重複性	Repeatability	< 1 %F.S
蠕變/回零(20分鐘)	20mins Creep/DR	< 1 %F.S
輸出溫度影響	Temperature Effect On Output	< 0.3 %F.S/10°C
零點溫度影響	Temperature Effect On Zero	< 0.3 %F.S/10°C
零點平衡	Zero Balance	±0.0200 mV/V
輸入阻抗	Input Impedance	350±5 Ω
輸出阻抗	Output Impedance	350±5 Ω
絕緣阻抗	Insulation Impedance	≥5000 MΩ
安全過載率	Safe Overload	150 %F.S
極限過載率	Ultimate Overload	200 %F.S
工作溫度範圍	Operating Temperature Range	-20~60 °C
建議工作電壓	Recommended Excitation	5~12 VDC
最大工作電壓	Maximum Excitation	15 VDC
材質	Construction	鋼合金 Steel Alloy
防水等級	Protection Class	IP66
電纜線	Cable	Φ5*3.5m
建議台面尺寸	Recommended Platform Size	

接線方式 Mode of Connection

棕：電源+，白：電源-，綠：信號+，黃：信號-
Brown[EXC+], White[EXC-], Green[SIG+], Yellow[SIG-]