



創唯實業有限公司

PLASTRONIC TECHNOLOGY CO., LTD.

TEL : 886-2-2276-3375

www.loadcell.com.tw

FAX : 886-2-2276-3557

www.plastronic.com.tw

E-mail: plastronictch@gmail.com


新北市24252新莊區化成路398巷13號

No.13, Lane 398, Huacheng Rd., Xinzhuang Dist., New Taipei City 24252, Taiwan

MN2



尺寸：47*12*6mm

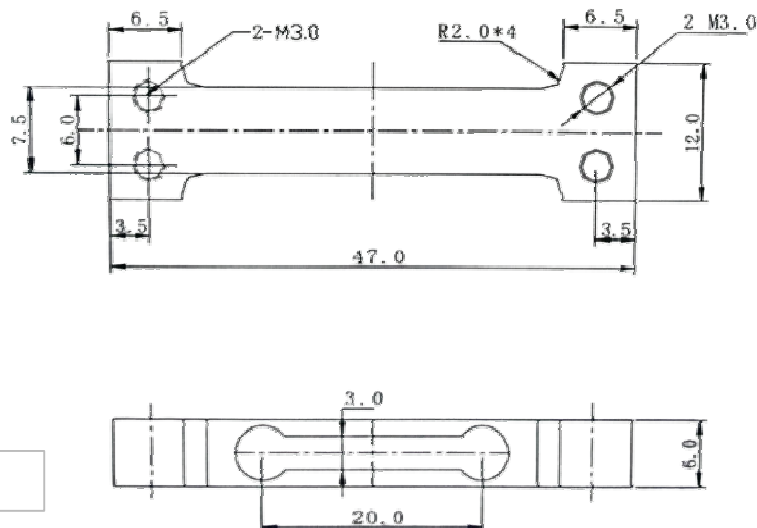

應用：口袋秤

Applications : Postage Scale

技術規格 Specification

額定荷重	Rated Capacities	100, 200, 300, 500, 750 g
額定輸出	Rated Output	0.8 ±0.15mV/V
精度等級	Accuracy class	
非線性	Non-linearity	0.05 %F.S
遲滯	Hysteresis	0.05 %F.S
重複性	Repeatability	0.05 %F.S
蠕變/回零(20分鐘)	20mins Creep/DR	0.05 %F.S
輸出溫度影響	Temperature Effect On Output	0.05 %F.S/10℃
零點溫度影響	Temperature Effect On Zero	2 %F.S/10℃
零點平衡	Zero Balance	±0.100 mV/V
輸入阻抗	Input Impedance	1050±10% Ω
輸出阻抗	Output Impedance	1000±10% Ω
絕緣阻抗	Insulation Impedance	≥1000 MΩ
安全過載率	Safe Overload	150 %F.S
極限過載率	Ultimate Overload	200 %F.S
工作溫度範圍	Operating Temperature Range	-20~60 ℃
建議工作電壓	Recommended Excitation	5~12 VDC
最大工作電壓	Maximum Excitation	15 VDC
材質	Construction	鋁合金 Aluminum Alloy
防水等級	Protection Class	IP65
電纜線	Cable	φ0.8(4芯) × 8 cm
建議台面尺寸	Recommended Platform Size	50×50 mm

接線方式 Mode of Connection

紅：電源+，黑：電源-，綠：信號+，白：信號-
Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)