



創唯實業有限公司

PLASTRONIC TECHNOLOGY CO., LTD.

TEL : 886-2-2276-3375

www.loadcell.com.tw

E-mail: plastronictech@gmail.com


FAX : 886-2-2276-3557

www.plastronic.com.tw


新北市24252新莊區化成路398巷13號

No.13, Lane 398, Huacheng Rd., Xinzhuang Dist., New Taipei City 24252, Taiwan

BL2

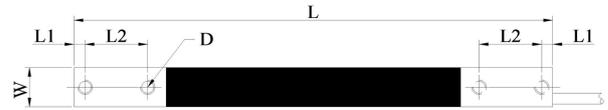

俯視 (Top View)

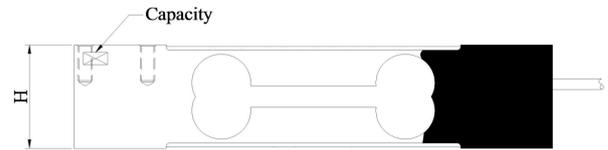

主視 (Front View)

TYPE	L	L1	L2	W	H	D
0.3-2 (kg)	130	3	17	11	29	4-M4 DP10
0.3,0.6 (kg)	110	5	7	10	32	4-M3 DP10

應用：天平秤、計價秤、計數秤

Applications: Balance, Pricing Scale, Counting Scale

技術規格 Specification

額定荷重 Rated Capacities 0.3, 0.5, 0.6, 0.75, 1, 2 (kg)

額定輸出 Rated Output 1.0±0.15 mV/V

非線性 Non-linearity 0.03 %F.S

遲滯 Hysteresis 0.03 %F.S

重複性 Repeatability 0.02 %F.S

蠕變/回零(20分鐘) 20mins Creep/DR 0.03 %F.S

輸出溫度影響 Temperature Effect On Output 0.02 %F.S/ 10°C

零點溫度影響 Temperature Effect On Zero 0.03 %F.S/ 10°C

零點平衡 Zero Balance ±0.0100 mV/V

輸入阻抗 Input Impedance 410±15 Ω

輸出阻抗 Output Impedance 350±5 Ω

絕緣阻抗 Insulation Impedance ≥5000 MΩ

安全過載率 Safe Overload 150 %F.S

極限過載率 Ultimate Overload 200 %F.S

工作溫度範圍 Operating Temperature Range -20~60 °C

建議工作電壓 Recommended Excitation 5~12 VDC

最大工作電壓 Maximum Excitation 15 VDC

材質 Construction 鋁合金 Aluminum Alloy

防水等級 Protection Class IP66 / IP67

電纜線 Cable φ4×25 cm

建議台面尺寸 Recommended Platform Size 200×200 mm

接線方式 Mode of Connection

紅：電源+，黑：電源-，綠：信號+，白：信號-
Red (EXC+) ,Black (EXC-) ,Green (SIG+) ,White (SIG-)